ROOF RACK CROSSBARS INSTALLATION GUIDE

For Jeep Cherokee with Flush Roof Rails

SPECIFICATION

Model year:	Fit 2026+ Cherokee Models with factory flush roof rails.
Maximum load capacity:	75KGs/165LBs in total, evenly distributed
⚠	Refer to the car user manual for the recommended limitation from the factory.

PART LIST

TOOL INCLUDED

M5

PART INDEX	DESCRIPTION	QTY.
A	Front Bar and Rear Bar	2
B	Left/Driver and Right/Passenger Brackets	4
C	Caps	4
D	Metal plates with nuts	4
E	M6x14mm Bolts (for fixing brackets to bar)	8
F	Rubber Strip	1
G	M6x20mm Bolts and Washers (for fixing brackets to rails)	8
H	Keys	2

1 ASSEMBLY

Insert a metal plate into the tube, and line up the hole with a bracket.

Keep the bolt loose to ensure the bracket is adjustable until the bracket is fixed on the roof rails.

Cut the rubber strip into shorter pieces upon the spaces before or after the bracket and seal the seam accordingly after the brackets are fixed on the roof rails.

2 INSTALLATION

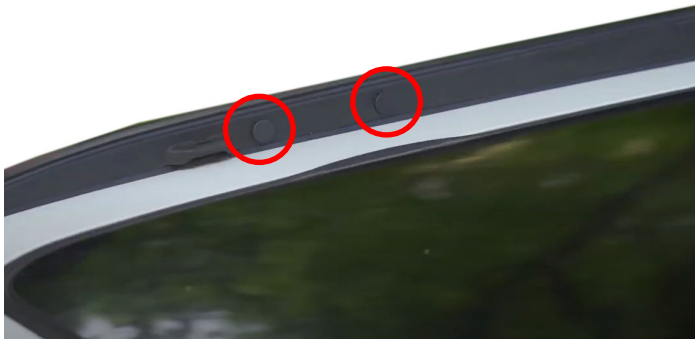

1. Remove 8 plugs from roof rails by twisting the plugs counter clockwise by hand or remove the plug by using a pry tool.

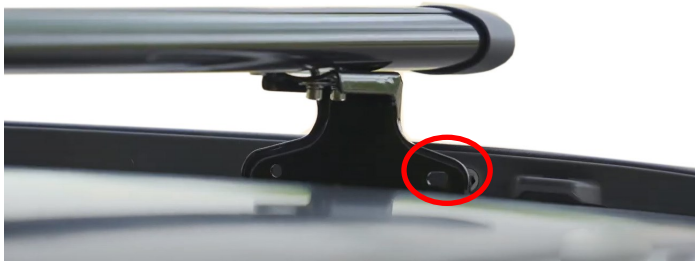

2. Line up the holes between the roof rails and the brackets, use the bolt (G) to fix the brackets to the roof rails, and avoid using power tools to overtighten the bolts. Use the torque wrench to tighten all bolts. Torque the wrench until the needle lines up with the line to assure you have the proper torque.(8 Nm)

3. Tighten bolts (G) with torque wrench. Torque the wrench until the needle lines up with the line to assure you have the proper torque.

2 INSTALLATION

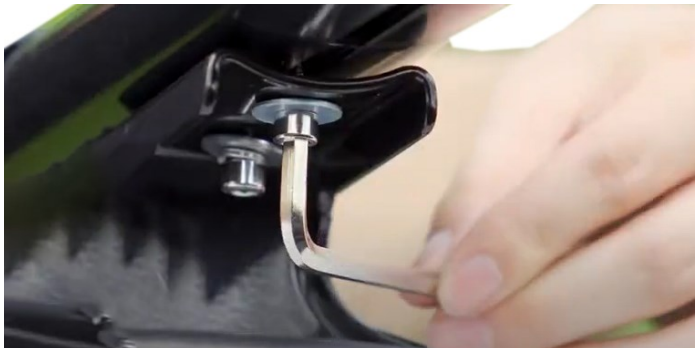

4. Start securing the crossbars by locking the brackets using the key and turning it into a counter-clockwise position. Double-check the crossbars if all bolts (E & G) are tightly secured.

FULL INSTALLATION VIEW

SUPPORT

Visit https://rockautoaccs.com for more products

Contact at rockmautox@gmail.com for any concerns or problems in Canada.

SAFETY NOTES

Never Exceed the manufacturer's roof rack load limit.

Ensure load is evenly distributed between the two crossbars and that it is as low as possible refer to specification.

Confirm lightness every 1000 km, periodically check that the load is secure and crossbars are securely tightened.

Ensure that the crossbar installed in correct orientation.

Ensure that the crossbars are fully installed to the side supports with no gaps.

ROKIOTOEX will warranty all ROKIOTOEX brand car rack systems and its accessories manufactured by ROKIOTOEX during the time that an original retail purchaser owns the product. This warranty terminates if a purchaser transfers the product to any other person.

Subject to the limitations and exclusions described in this warranty, ROKIOTOEX will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. In addition, ROKIOTOEX may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product or a credit to be used toward the purchase of a new ROKIOTOEX load carrier system.

No warranty is given for defects caused by normal wear and tear, cosmetic rust, scratches, accidents, unlawful vehicle operation, or modification of, or any types of repair of, a load carrier system other than those authorized by ROKIOTOEX.

No warranty is given for defects resulting from conditions beyond ROKIOTOEX's control including, but not limited to, misuse, overloading, or failure to assemble, mount or use the product in accordance with ROKIOTOEX's written instructions or guidelines included with the product or made available to the purchaser.

No warranty is given for Rokiotoex products purchased outside of the United States, Canada and Mexico.

In the event that a product needs to be returned to ROKIOTOEX, a ROKIOTOEX technician at the address or telephone number listed above will provide the purchaser with the appropriate mailing address and any additional instructions. Please note that the purchaser will be responsible for the cost of mailing the product to ROKIOTOEX and that proof of purchase in the form of an original purchase invoice or receipt and a detailed description of the defect must be included in the mailing.

DISCLAIMER OF LIABILITY

REPAIR OR REPLACEMENT OF A DEFECTIVE PRODUCT OR THE ISSUANCE OF A REFUND OR CREDIT (AS DETERMINED BY ROKIOTOEX) IS A PURCHASER'S EXCLUSIVE REMEDY UNDER THIS WARRANTY. DAMAGE TO A PURCHASER'S VEHICLE, CARGO AND/OR TO ANY OTHER PERSON OR PROPERTY IS EXCLUDED.

THIS WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ROKIOTOEX'S SOLE LIABILITY TO ANY PURCHASER IS LIMITED TO THE REMEDY SET FORTH ABOVE. IN NO EVENT WILL ROKIOTOEX BE LIABLE FOR ANY LOST PROFITS, LOST SALES, OR FOR ANY CONSEQUENTIAL, DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT BE APPLICABLE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.