CROSSBARS INSTALLATION GUIDE

For Lexus 2022 + NX with Roof Side Rails

SPECIFICATION

Model year:	Compatible with Lexus NX 250, NX 350, NX 350h, NX 450h+ Trims, 2022, 2023 Models with factory-equipped roof side rails.
Maximum load capacity:	75KGs/165LBs in total, evenly distributed
⚠	Refer to car user manual for the recommended limitation from factory.

PART LIST

TOOLS INCLUDED

NOTE: *Socket #12 is required but not included in the package.*

PART INDEX	DESCRIPTION	QTY.
A	Aluminum bars (longer @ front and shorter @ rear)	2
B1	Left/Driver Brackets (LHF, LHR)	2
B2	Right/Passenger Brackets (FHR, RHR)	2
C1	Left/Driver Covers (LHF, LHR)	2
C2	Right/Passenger Covers (FHR, RHR)	2
D	ACME Nut Block	4
E	M6x40mm Bolts (for fixing bracket to bar)	4
F	M8x40mm Bolts (for fixing bracket to roof rail)	4
G	M8 Washers	4
H	M6 Washer	4
I	M6x16mm Washer	4

1 ASSEMBLY

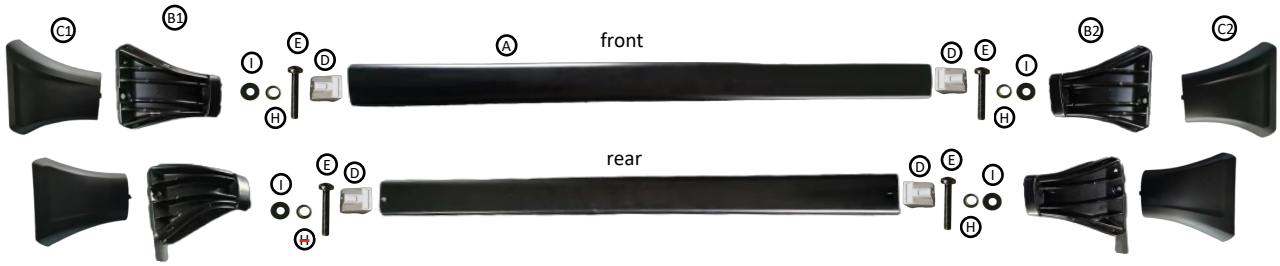

Tip: Lift the cover from the bottom side of the bracket with small flat screwdriver to take off the cover off bracket.

Attention:
The block nut button at the bottom needs to be positioned in the hole of the bar end.

Tightening the bolts to assemble the brackets to bars until the crossbars are fully assembled with 1~2mm space at each end.

Wait to check the fitting until the assembled crossbars with the correct brackets are correctly positioned and aligned.

Group long bolt and washer for each bracket before starting the installation.

Put the covers back to the brackets after the crossbars are full secured on roof rails.

2 INSTALLATION

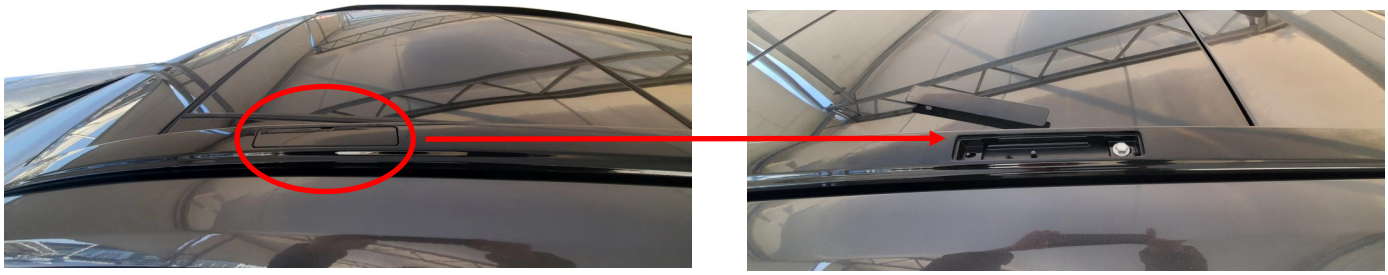

1. Remove the cover on each roof rail.

2. Identify the positions of each bracket and fix it on to roof rails. The crossbar taper side faces backward. Put crossbars on rooftop, using a soft blanket or cover at the bottom to prevent from scratching or damaging the car body.

3. Confirm bars are well positioned with brackets. Keep tightening the M6 bolts by shifting between left and right brackets until both eventually fixed with the bars.

INSTALLATION

4. Put the cover on bracket, line up both sides of the cover until the cover tips holding bracket sides properly. Insert the tab at the top of the bracket and push down the cover to get it on.

FULL INSTALLATION VIEW

SUPPORT

Visit https://rockautoaccs.com for more products

Contact at rockmautox@gmail.com for any concerns or problems in Canada.

SAFETY NOTES

Never Exceed the manufacture's roof rack load limit.

Ensure load is evenly distributed between the two crossbars and that it is as low as possible refer to specification.

Confirm lightness every 1000 km, periodically check that the load is secure and crossbars are securely tightened.

Ensure that crossbar installed in correct orientation.

Ensure that the crossbars are fully installation to the side supports with no gaps.

ROKIOTOEX will warranty all ROKIOTOEX brand car rack systems and its accessories manufactured by ROKIOTOEX during the time that an original retail purchaser owns the product. This warranty terminates if a purchaser transfers the product to any other person.

Subject to the limitations and exclusions described in this warranty, ROKIOTOEX will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. In addition, ROKIOTOEX may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product or a credit to be used toward the purchase of a new ROKIOTOEX load carrier system.

No warranty is given for defects caused by normal wear and tear, cosmetic rust, scratches, accidents, unlawful vehicle operation, or modification of, or any types of repair of, a load carrier system other than those authorized by ROKIOTOEX.

No warranty is given for defects resulting from conditions beyond ROKIOTOEX's control including, but not limited to, misuse, overloading, or failure to assemble, mount or use the product in accordance with ROKIOTOEX's written instructions or guidelines included with the product or made available to the purchaser.

No warranty is given for Rokiotoex products purchased outside of the United States, Canada and Mexico.

In the event that a product needs to be returned to ROKIOTOEX, a ROKIOTOEX technician at the address or telephone number listed above will provide the purchaser with the appropriate mailing address and any additional instructions. Please note that the purchaser will be responsible for the cost of mailing the product to ROKIOTOEX and that proof of purchase in the form of an original purchase invoice or receipt and a detailed description of the defect must be included in the mailing.

DISCLAIMER OF LIABILITY
REPAIR OR REPLACEMENT OF A DEFECTIVE PRODUCT OR THE ISSUANCE OF A REFUND OR CREDIT (AS DETERMINED BY ROKIOTOEX) IS A PURCHASER'S EXCLUSIVE REMEDY UNDER THIS WARRANTY. DAMAGE TO A PURCHASER'S VEHICLE, CARGO AND/OR TO ANY OTHER PERSON OR PROPERTY IS EXCLUDED.

THIS WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ROKIOTOEX'S SOLE LIABILITY TO ANY PURCHASER IS LIMITED TOTHE REMEDY SET FORTH ABOVE. IN NO EVENT WILL ROKIOTOEX BE LIABLE FOR ANY LOST PROFITS, LOST SALES, OR FOR ANY CONSEQUENTIAL, DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT BE APPLICABLE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.